

---

**GROUP 54C****CONTROLLER  
AREA NETWORK  
(CAN)****CONTENTS**

<b>GENERAL INFORMATION .....</b>	<b>54C-2</b>	<b>SELF-DIAGNOSIS .....</b>	<b>54C-7</b>
<b>STRUCTURE .....</b>	<b>54C-3</b>	<b>CAN BUS DIAGNOSTICS .....</b>	<b>54C-7</b>
<b>SYSTEM OPERATION.....</b>	<b>54C-4</b>		

## GENERAL INFORMATION

M2542000100308


CAN, an abbreviation for Controller Area Network, is an ISO-certified international standard for a serial multiplex communication protocol\*. A communication circuit employing the CAN protocol connects each ECU, and sensor data can be shared among, which enables more reduction in wiring.

*NOTE: \* : The regulations have been decided in detail, from software matters such as the necessary transmission rate for communication, the system, data format, and communication timing control method to hardware matters such as the harness type and length and the resistance values.*

CAN offers the following advantages.

- Transmission rates are much faster than those in conventional communication (up to 1 Mbps), allowing much more data to be sent.
- It is exceptionally immune to noise, and the data obtained from each error detection device is more reliable.
- Each ECU connected via the CAN communicates independently, therefore if the ECU enters damaged mode, communications can be continued in some cases.

# STRUCTURE

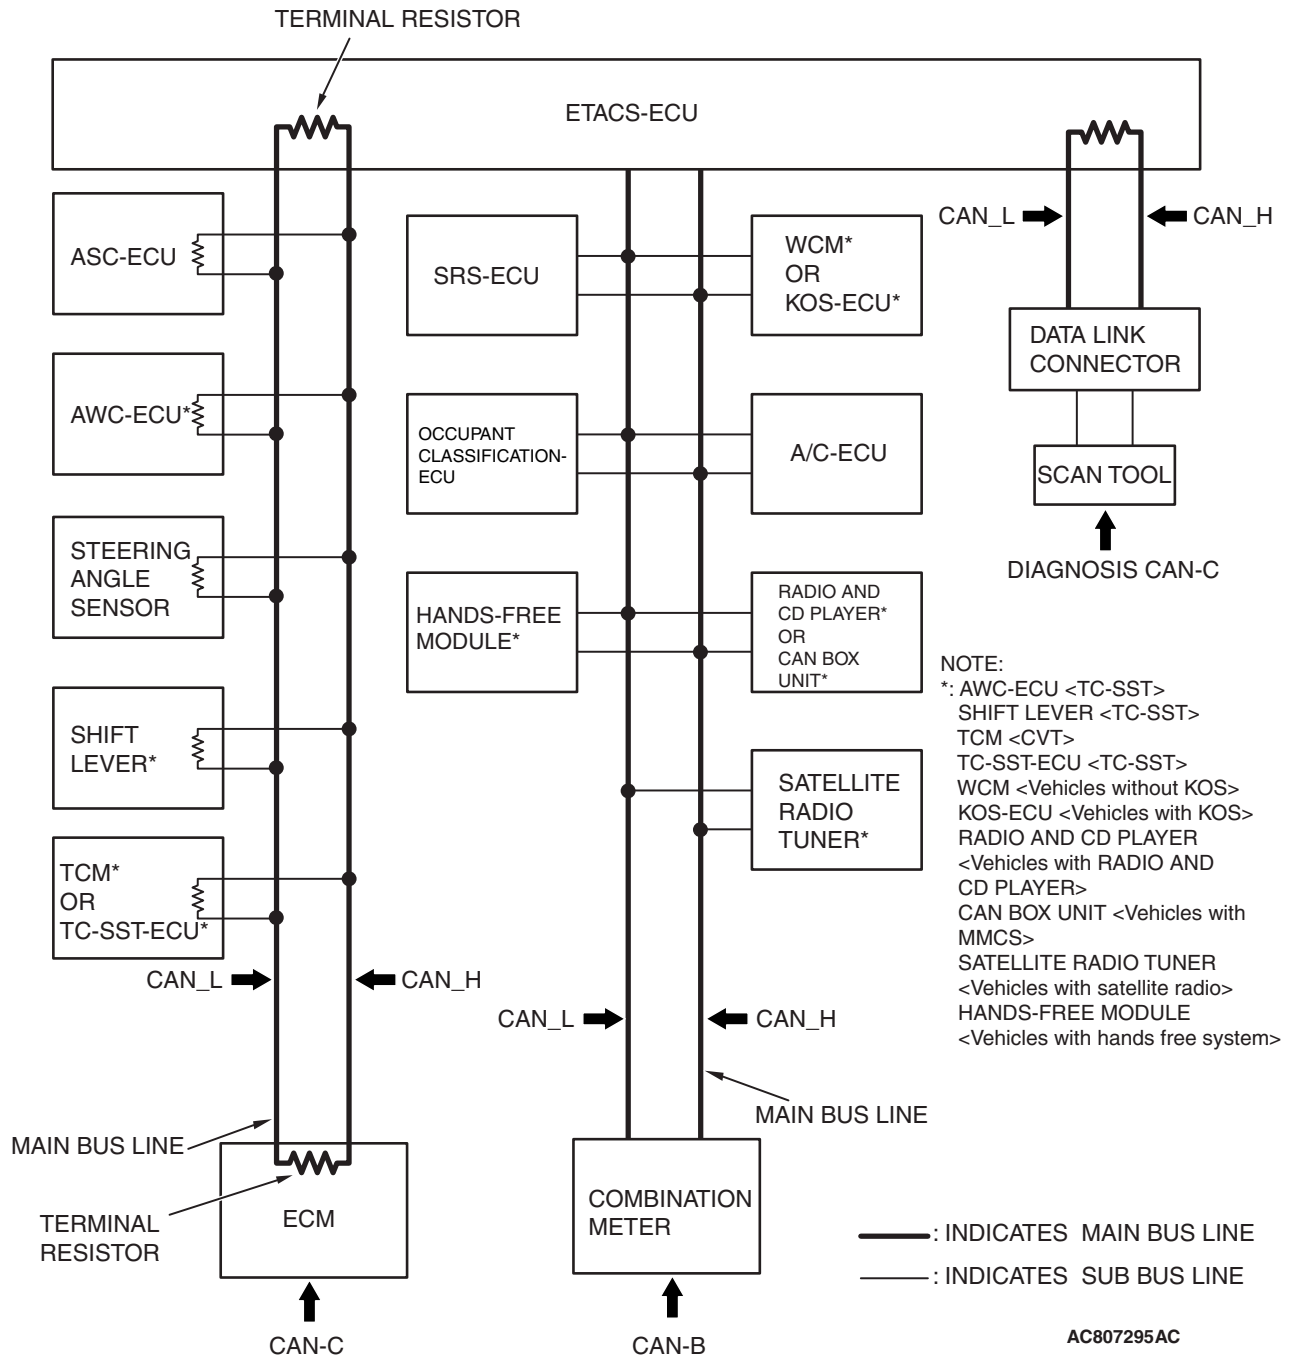

- A gateway function has been integrated to ETACS-ECU as the network central ECU. (Refer to GROUP 54A, ETACS-ECU P.54A-43.)
- The CAN system consists of the following three networks: CAN-B (middle-speed body network), CAN-C (high-speed power train network), and the diagnosis CAN-C (diagnosis exclusive network). Each ECU is connected to one of the networks depending on its functions.
- The CAN bus line consists of two lines, CAN\_L and CAN\_H (CAN Low and CAN High, respectively), as well as two terminal resistors (A twisted-pair cable, highly resistant to noise, is used for the communications line).
- The CAN bus line connecting two dominant ECUs is the main bus line, and the CAN bus line connecting each ECU is the sub-bus line.

- With CAN-C, the terminal resistors are incorporated in ECU. Resistors with approximately 120 ohms are used for the dominant ECU, and that with 3 kilo ohms is used for the non-dominant ECU.

**NOTE:**

- *Dominant ECU: ETACS-ECU and engine ECU*
  - *Non-dominant ECU: ECU and sensor on CAN-C network, excluding ETACS-ECU and engine ECU*
- To the CAN bus line, ECU, sensor, and data link connector are connected as follows for each network.

**CAN-B**

- WCM <vehicles without KOS>
- KOS-ECU <vehicles with KOS>
- SRS-ECU
- Occupant classification-ECU

- A/C-ECU
- Radio and CD player <vehicles with radio and CD player>
- CAN box unit <vehicles with MMCS>
- Hands-free module <vehicles with hands-free system>
- Satellite radio tuner <vehicles with satellite radio>
- Combination meter

**CAN-C**


- ASC-ECU
- Steering angle sensor
- AWC-ECU <TC-SST>
- Shift lever <TC-SST>
- TCM <CVT>
- TC-SST-ECU <TC-SST>
- ECM

**DIAGNOSIS CAN-C**

- Data link connector

**SYSTEM OPERATION**

M2542000300272

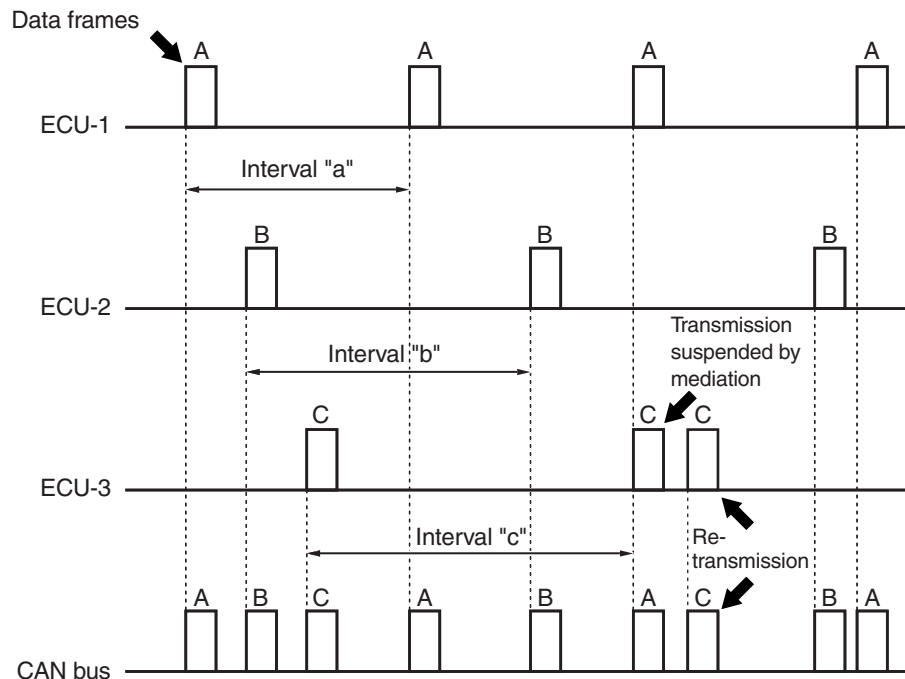

AC206267AF

The CAN communication system is described below.

- Each ECU communicating with CAN periodically sends several sensors' information on CAN bus as data frame (called periodical sending data). For further details, consult the data frame section.
- ECUs requiring data on CAN bus can receive data frames sent from each ECU simultaneously.

- The data sent from each ECU conducting CAN communication is transmitted at 10-10000 msec interval depending on necessity of data.

*NOTE: In the figure above, the data frame A is transmitted in "a" intervals, while the data frames B and C are transmitted at intervals "b" and "c," respectively.*

- A single ECU transmits multiple data frames.

- When data frames conflict with one another (when plural ECUs transmit signals simultaneously), data is prioritized for transmission by mediation, therefore, plural data frames are not sent simultaneously. For further details, consult the mediation section.
- Data is transmitted not by the conventional voltage-using method but by voltage potential difference. For further details, consult the section on CAN bus voltage transformation .
- Reliability of each ECU transmitting signals via CAN communication is secured by several error detection and recovery processes. For further details, consult the sections on error detection and system recovery.
- For major communication signals (transmitting signals) among ECUs.

### MEDIATION

Because each ECU transmits data independently on the CAN bus, there are cases of data collision when multiple data frames that ECUs attempt to transmit simultaneously (if multiple ECUs transmit at nearly the same moment). At this moment, processing of the ECUs attempting transmission is performed in the following way.



1. Data frame with high priority is transmitted first according to ID codes memorized in data frames.
2. Transmission of low-priority data (data frames) is suspended by the issuing ECUs until the bus clears (when no transmission data exists on the CAN bus).

*NOTE: If the suspended state continues for a specific time, new data (data frame content) is created and sent.*

3. ECU containing suspended data frames transmits the data when the bus becomes available.

*NOTE: There is enough capacity on the CAN bus, which never prevents data frames from being sent.*

### VOLTAGE TRANSFORMATION ON THE CAN-B BUS and CAN-C BUS

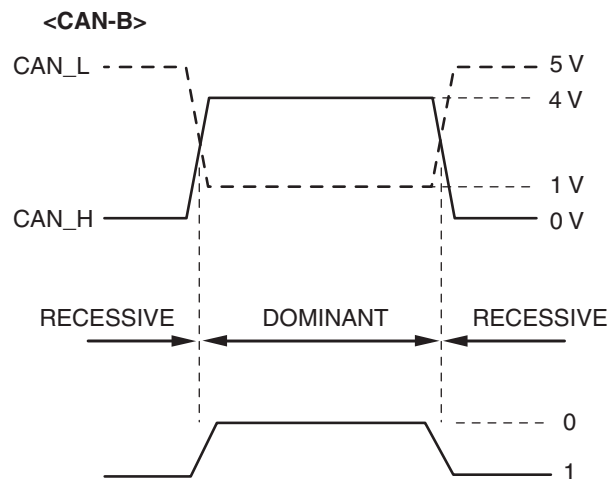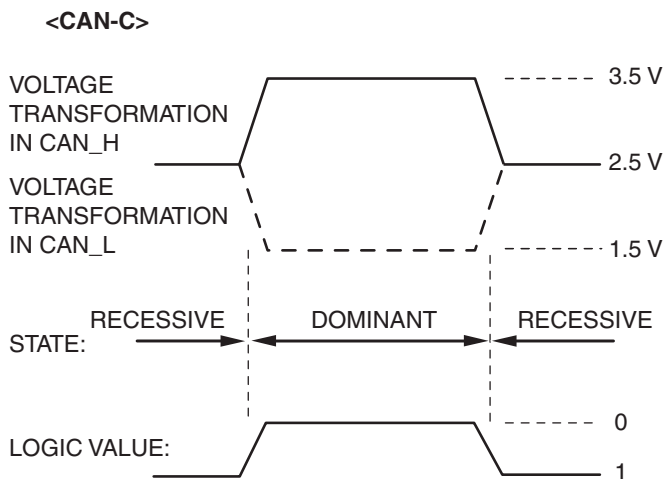


AC507623AB

The voltage transformation (output signal) when the data frame is sent to the CAN-C bus line has a distinctive CAN-C profile. The transmitting ECU through the CAN\_H and CAN\_L bus lines sends 2.5 to 3.5 V signals to the CAN\_H side and 2.5 to 1.5 V signals to the CAN\_L side. The receiving ECU reads the data from the CAN\_H and CAN\_L potential difference. "Recessive" refers to the state where both CAN\_H and CAN\_L are under the 2.5 V state, and "Dominant" refers to the state where CAN\_H is under the 3.5 V state and CAN\_L is under the 1.5 V state. On the other hand, the voltage transformation (output

signal) when the data frame is sent to the CAN-B bus line has a distinctive CAN-B profile. The transmitting ECU through the CAN\_H and CAN\_L bus lines sends 0 to 4 V signals to the CAN\_H side, and 1 to 5 V signals to the CAN\_L side. "Recessive" is a state in which CAN\_H is at 0 V and CAN\_L is at 5 V, and "Dominant" is a state in which CAN\_H is at 4 V and CAN\_L is at 1 V. By transformation mainly to 2.5 V, even in cases when voltage is rendered 0 from faulty grounding or the like (causing a problem of an approximate 0.5 V increase on the communications

line), communication can be continued uninterrupted. Employing dual communications lines improves reliability to prevent the presence of noise, compared to the conventional communication method.

## DATA FRAMES

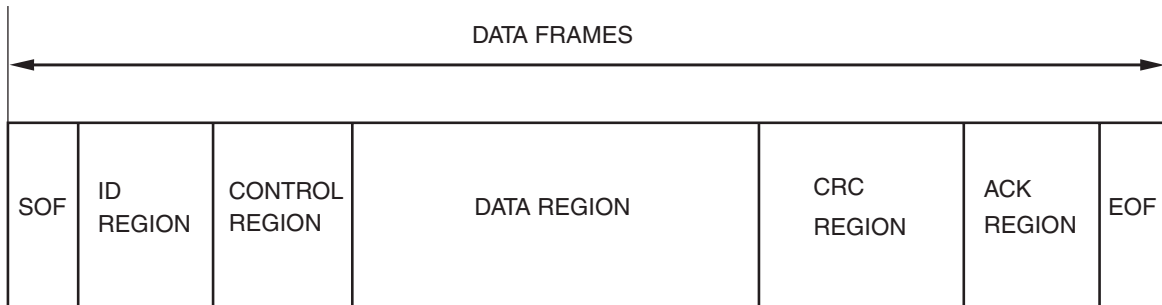

AC504950AB

The data frame, which is sent from each ECU (or sensor) to the CAN bus line, consists of the fields below.

### SOF (Start of Frame)

- Indicates the start of the frame

### ID (Identifier) region

- Identifies the data content while specifying priority rank in case of mediation

### Control region

- Specifies the frame type, data length, etc.

### Data region

- Values used for data control, etc.

### CRC (Cyclic Redundancy Check) region

- Region where to check for errors in sent data. The transmitting ECU calculates data regions by applying prescribed operations and stores the results. The receiving ECU detects erroneous communication by comparing the CRC region with the data region.

### ACK (Acknowledge) region

- Region where to conform the reception of sent data

### EOF (End of Frame)

- Indicates the end of the frame

## ERROR DETECTION AND RECOVERY

CAN protocol secures its reliability of communication by providing several error detection function such as CRC shown in data frame, and the recovery function (recovery is performed by resending, from abnormal state such as transmission errors). If an error is detected but it is not resolved even after recovery, communication is stopped. This state is called "Bus Off."

## SELF-DIAGNOSIS

M2542000400235

- CAN self-diagnosis is performed by each ECU connected to the CAN bus.
- diagnosis codes related to communication are named with the capital letter U, and are called "U-codes."
- A summary of the CAN self-diagnosis system is presented below. For further details on each diagnosis code stored by the ECUs.

### TIME-OUT

Each ECU transmits data frames periodically. If the data frame is not received within the specified period, the intended receiving ECU transmits a diagnosis code indicating communication time-out for the ECU that failed to transmit.

### BUS OFF

Related to a communication error that persists even after the transmitting ECU attempts recovery for a specified number of attempts or that persists for a specified period after recovery. Communication is stopped and this diagnostic code is issued.

## CAN BUS DIAGNOSTICS

M2542000500254

As ECUs are connected via CAN bus (including scan tool), always diagnose CAN bus to confirm its normality when inspecting. Simply by performing scan tool screen operations, the following inspections can be performed automatically, and the result can be used to verify the CAN bus status.

- Confirmation of diagnosis code of ETACS-ECU
- Confirmation of communication of all ECUs

---

## NOTES